

A modern kitchen cabinet with a dark countertop and a white drawer. The drawer is open, revealing a stack of white plates. A small glass vase with red flowers sits on the countertop. The cabinet features a sleek, minimalist design with a dark base and a white upper section. The floor is made of light-colored wood.

Furniture LED Lighting System

FURNITURE LIGHTING SYSTEM

At Max World Marketing Sdn Bhd, we believe that lighting is not just about brightness; it's an art that enhances the beauty of your furniture and living spaces. Our Furniture Lighting System is meticulously crafted to bring a touch of sophistication and functionality to your home. Whether you are looking to accentuate your cabinets, showcase your prized possessions, or create an ambiance that suits your style, our lighting solutions have you covered. With a commitment to quality, innovation, and design, we invite you to explore the world of exquisite furniture lighting with Sommer Marketing Sdn Bhd. Illuminate your space, elevate your lifestyle.





Cabinet with LED Lighting




LED ACRYLIC LIGHT PANEL


Acrylic Patterns



White Cloud Rock (E2)

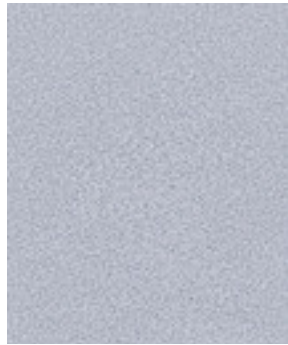

Silk Grey (B1)

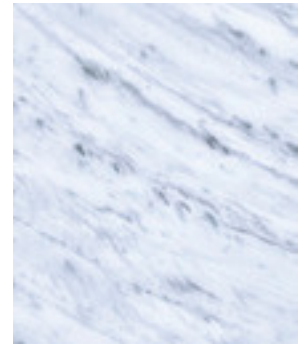


Inkstone Rock (A1)




Woven White Linen (F1)



White Linen (G1)




Pure White (W2)



Side Panel



Backlit Panel Top View

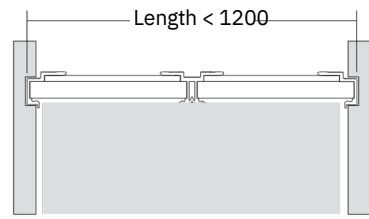

Backlit Panel Extension Top View

Feature It has strong color durability, high surface gloss, bright colors, soft overall luminous brightness, and built-in light source. No external wiring is required, eliminating easy short circuit situations.


Specification

Installation Suggestion Wardrobe, Open cabinet back plate, and cabinet is used as the back wall of the operating desk.


Switch Standard with no switch, optional with Sommer induction switch.
SLT 39960 LED Driver 60W-Premium and
SLT 37008 Wireless Touch Timing Switch.

Code	Description	Acrylic Pattern	Colour Temp.
SLT 31706-A1	Light Panel	Inkstone Rock (A1)	3000K - 6000K
SLT 31705-E2	LED Acrylic Light Panel	White Cloud Rock (E2)	3000K - 6000K
SLT 31704-B1	LED Acrylic Light Panel	Silk Grey (B1)	3000K - 6000K
SLT 31703-F1	LED Acrylic Light Panel	Woven White Linen (F1)	3000K - 6000K
SLT 31702-G1	LED Acrylic Light Panel	White Linen (G1)	3000K - 6000K
SLT 31701-W2	LED Acrylic Light Panel	Pure White (W2)	3000K - 6000K


CONCEAL LED LIGHT

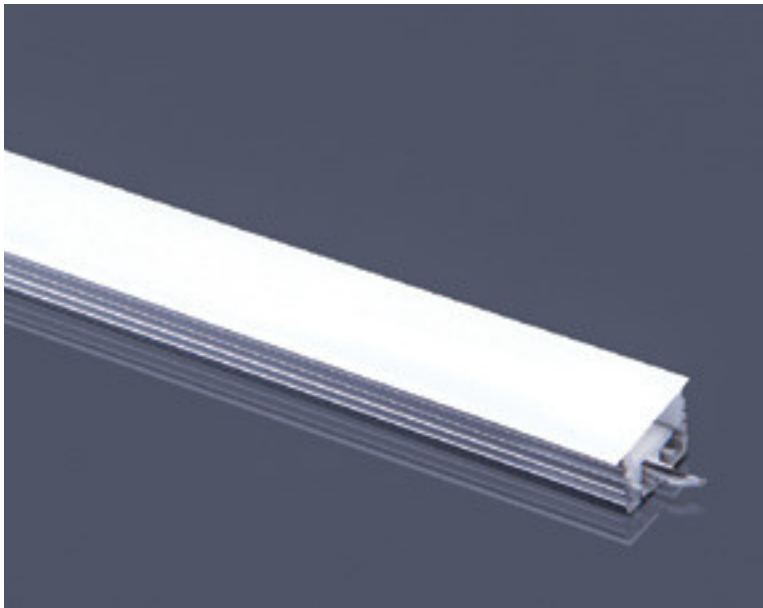

32405 & 32305

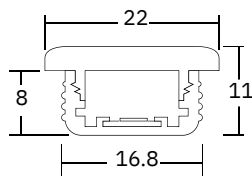

SLT 32405 &
SLT 32305
Profile Dimension



Model will same
lighting effect


Specification	Connecting Cable	1.8 metre 30000 hr.
	LED Tested	Anodized matt
	Finishing	silver Aluminium,
	Material	PC

Code	Length	Wattage	Voltage	Colour Temp.
SLT 32305.060	600 mm	5.9 W	DC 12V	3000 K (Warm Light)
SLT 32305.090	900 mm	8.8 W	DC 12V	3000 K (Warm Light)
SLT 32305.120	1200 mm	11.8 W	DC 12V	3000 K (Warm Light)
SLT 32305.150	1500 mm	14.7 W	DC 12V	3000 K (Warm Light)
SLT 32305.180	1800 mm	17.6 W	DC 12V	3000 K (Warm Light)
SLT 32305.240	2400 mm	23.5 W	DC 12V	3000 K (Warm Light)
SLT 32305.290	2900 mm	28.4 W	DC 12V	3000 K (Warm Light)
SLT 32405.060	600 mm	5.9 W	DC 12V	4000 K (Warm White)
SLT 32405.090	900 mm	8.8 W	DC 12V	4000 K (Warm White)
SLT 32405.120	1200 mm	11.8 W	DC 12V	4000 K (Warm White)
SLT 32405.150	1500 mm	14.7 W	DC 12V	4000 K (Warm White)
SLT 32405.180	1800 mm	17.6 W	DC 12V	4000 K (Warm White)
SLT 32405.240	2400 mm	23.5 W	DC 12V	4000 K (Warm White)
SLT 32405.290	2900 mm	28.4 W	DC 12V	4000 K (Warm White)


CONCEAL LED LIGHT (WITH PIR SENSOR SWITCH)




32306 & 32406 (with PIR Sensor Switch)

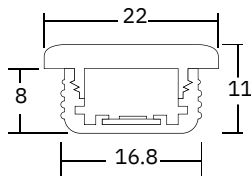

SLT 32306 &
SLT 32406
Profile Dimension

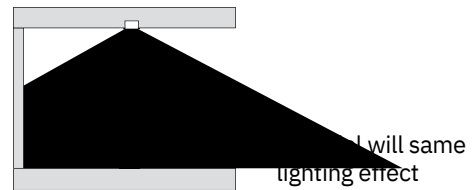

Specification	Connecting Cable	1.8 metre 30000 hr.
	LED Tested	Anodized matt
	Finishing	silver Aluminium,
	Material	PC





PIR Sensor
Switch


Code	Length	Wattage	Voltage	Colour Temp.
SLT 32406.567	567 mm	5.9 W	DC 12V	4000 K (Warm White)
SLT 32406.867	867 mm	8.8 W	DC 12V	4000 K (Warm White)
SLT 32406.1167	1167 mm	11.8 W	DC 12V	4000 K (Warm White)
SLT 32306.567	567 mm	5.9 W	DC 12V	3000 K (Warm Light)
SLT 32306.867	867 mm	8.8 W	DC 12V	3000 K (Warm Light)
SLT 32306.1167	1167 mm	11.8 W	DC 12V	3000 K (Warm Light)




ULTRA NARROW EMBEDDED LIGHT BAR

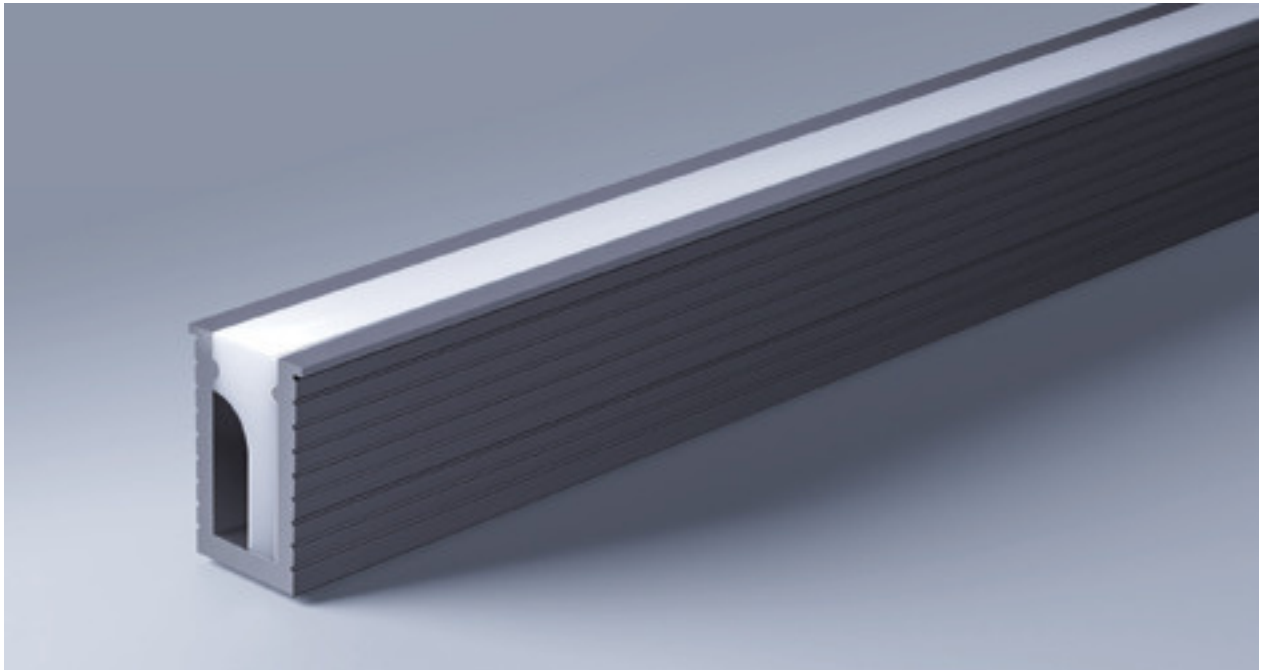

SLT 36408
Profile Dimension

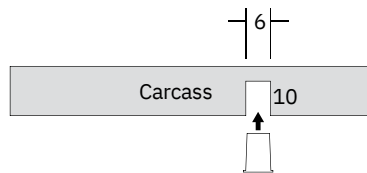

Top Mounted



Lighting effect

Specification



Only 4mm light, the limit is expected.
Standard with no switch, optional with Sommer induction switch.
Color: Titanium grey.

Code	Length	Wattage	Voltage	Colour Temp.
SLT 36408.060	600 mm	3.6 W	DC 12V	4000 K (Warm White)
SLT 36408.090	900 mm	5.4 W	DC 12V	4000 K (Warm White)
SLT 36408.120	1200 mm	7.2 W	DC 12V	4000 K (Warm White)
SLT 36408.150	1500 mm	9.0 W	DC 12V	4000 K (Warm White)
SLT 36408.180	1800 mm	10.8 W	DC 12V	4000 K (Warm White)
SLT 36408.240	2400 mm	14.4W	DC 12V	4000 K (Warm White)
SLT 36408.290	2900 mm	17.4 W	DC 12V	4000 K (Warm White)


every home needs




ANTI GLARE EMBEDDED LIGHT BAR

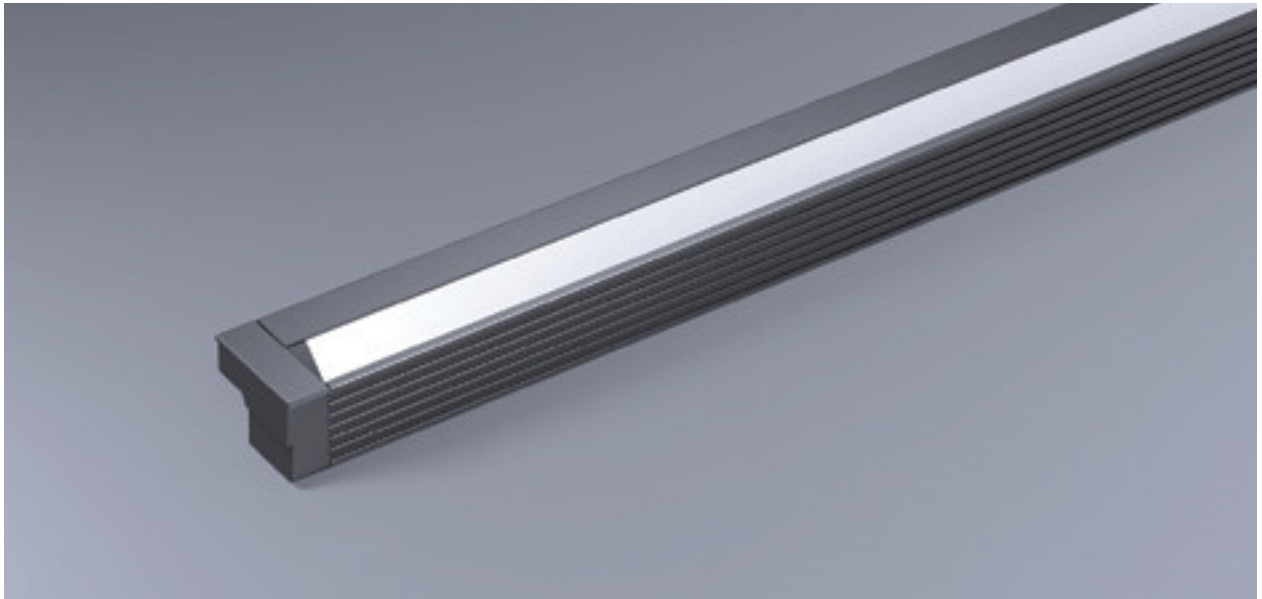

SLT 36411
Profile Dimension

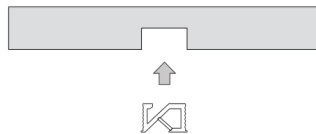

Top Mounted



Lighting
effect

Feature



- Embedded design hidden in the board, perfect integration.
- Humanized design, anti dazzle.
- Standard with no switch, optional with Sommer induction switch.

Specification	Connecting Cable	1.8 metre
	LED Tested	30000 hr.
	Finishing	Titanium grey
	Material	Aluminium
	Switch	Not supply


Code	Length	Wattage	Voltage	Colour Temp.
SLT 36411-060	600 mm	3.6 W	DC 12V	4000 K (Warm White)
SLT 36411-090	900 mm	5.4 W	DC 12V	4000 K (Warm White)
SLT 36411-120	1200 mm	7.2 W	DC 12V	4000 K (Warm White)
SLT 36411-150	1500 mm	9.0 W	DC 12V	4000 K (Warm White)
SLT 36411-180	1800 mm	10.8 W	DC 12V	4000 K (Warm White)
SLT 36411-240	2400 mm	14.4 W	DC 12V	4000 K (Warm White)
SLT 36411-290	2900 mm	17.4 W	DC 12V	4000 K (Warm White)




LED BACKLIT SHELF LIGHT

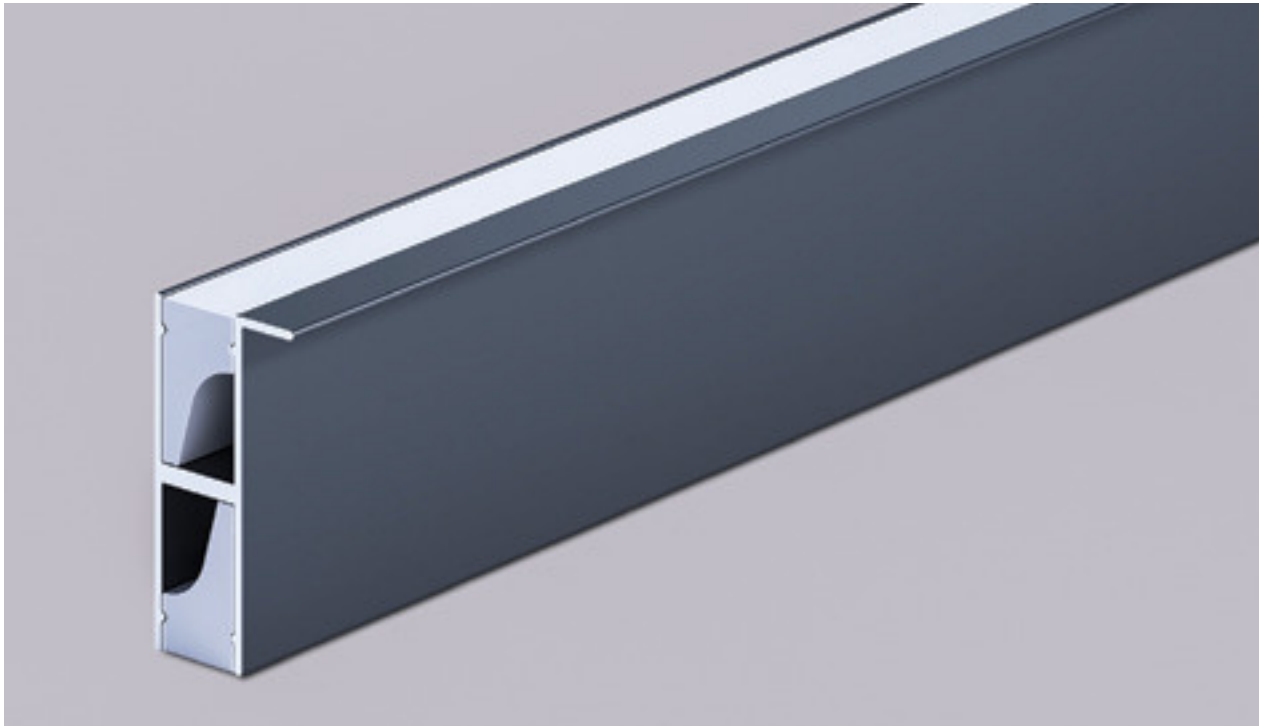

SLT 33400
Profile Dimension

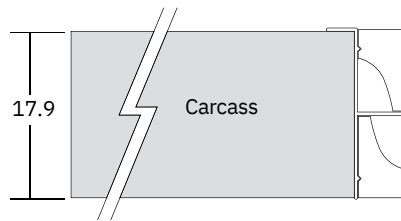

Back Mounted
Suitable for 18mm Panel




Lighting effect

Specification	Connecting Cable	1.8	metre
	LED Tested	30000	hr.
	Finishing	Platinum	
	Material	Grey	
		Aluminium	


Code	Length	Wattage	Voltage	Colour Temp.
SLT 33400-567	567 mm	11.4 W	DC 12V	4000 K (Warm White)
SLT 33400-867	867 mm	17.4 W	DC 12V	4000 K (Warm White)
SLT 33400-1167	1167 mm	23.4 W	DC 12V	4000 K (Warm White)




| LED STRIP CABINET LIGHT



SLT 36406
Profile Dimension

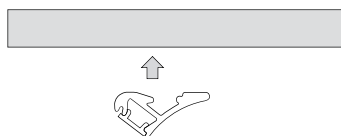

Surface Mounted



Lighting Effect



Specification	Connecting Cable	1.8 metre 30000 hr.
	LED Tested	Anodized matt black
	Finishing	Aluminium
	Material	

Code	Length	Wattage	Voltage	Colour Temp.
SLT 36406-060	600 mm	5.4 W	DC 12V	4000 K (Warm White)
SLT 36406-090	900 mm	8.8 W	DC 12V	4000 K (Warm White)
SLT 36406-120	1200 mm	11.8 W	DC 12V	4000 K (Warm White)

every home needs



LED GLASS EDGE LIGHT

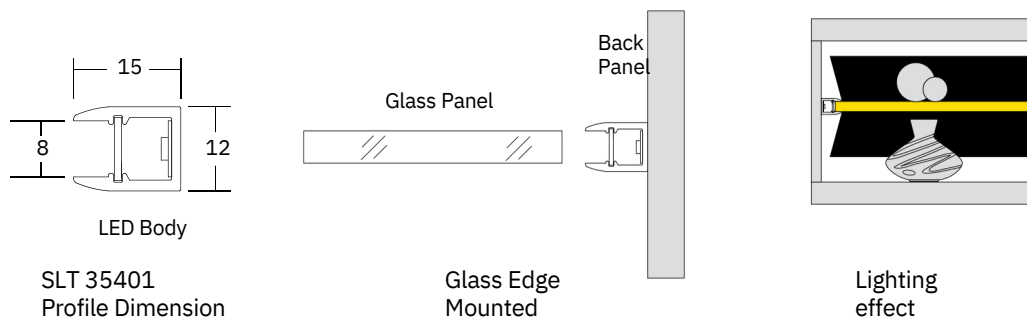
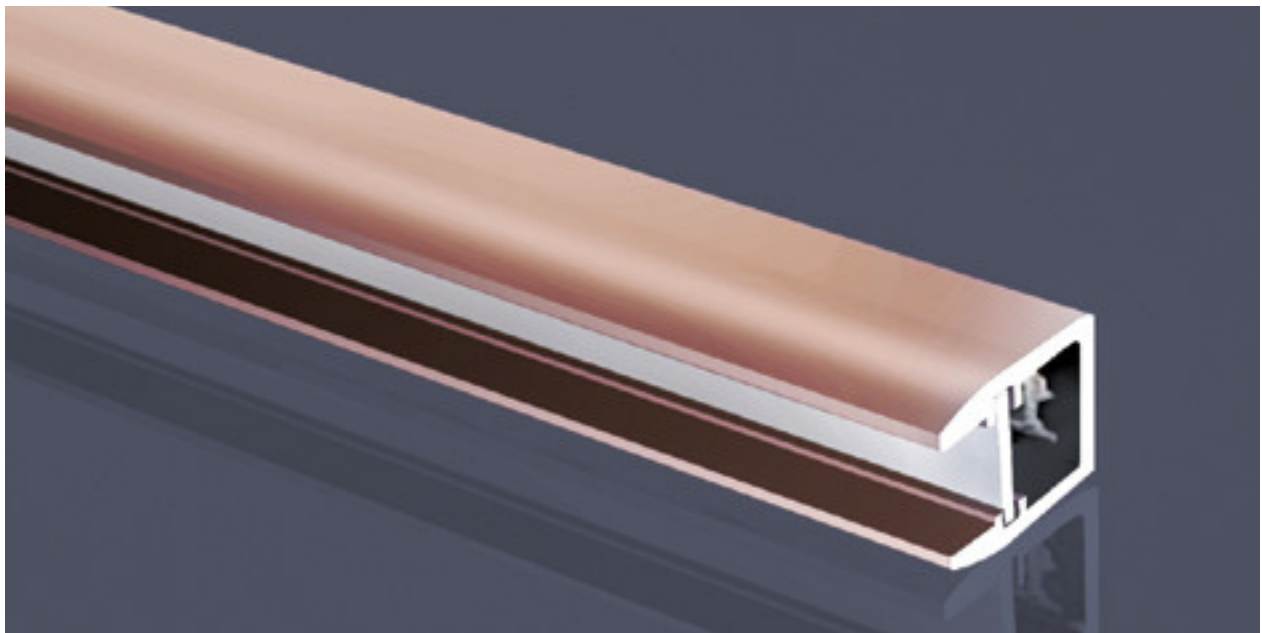


Specification	Connecting Cable	1.8 metre 30000
	LED Tested	hr. Champagne
	Finishing	gold Aluminium,
	Material	PC 8 mm Not
	Glass thickness	supply
	Switch	


Code	Length	Wattage	Voltage	Colour Temp.
SLT 35401-060	567 mm	5.9 W	DC 12V	4000 K (Warm White)
SLT 35401-090	867 mm	8.8 W	DC 12V	4000 K (Warm White)



| LED DRAWER LIGHT

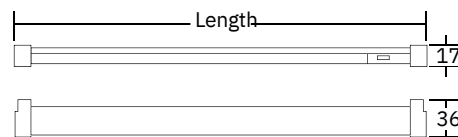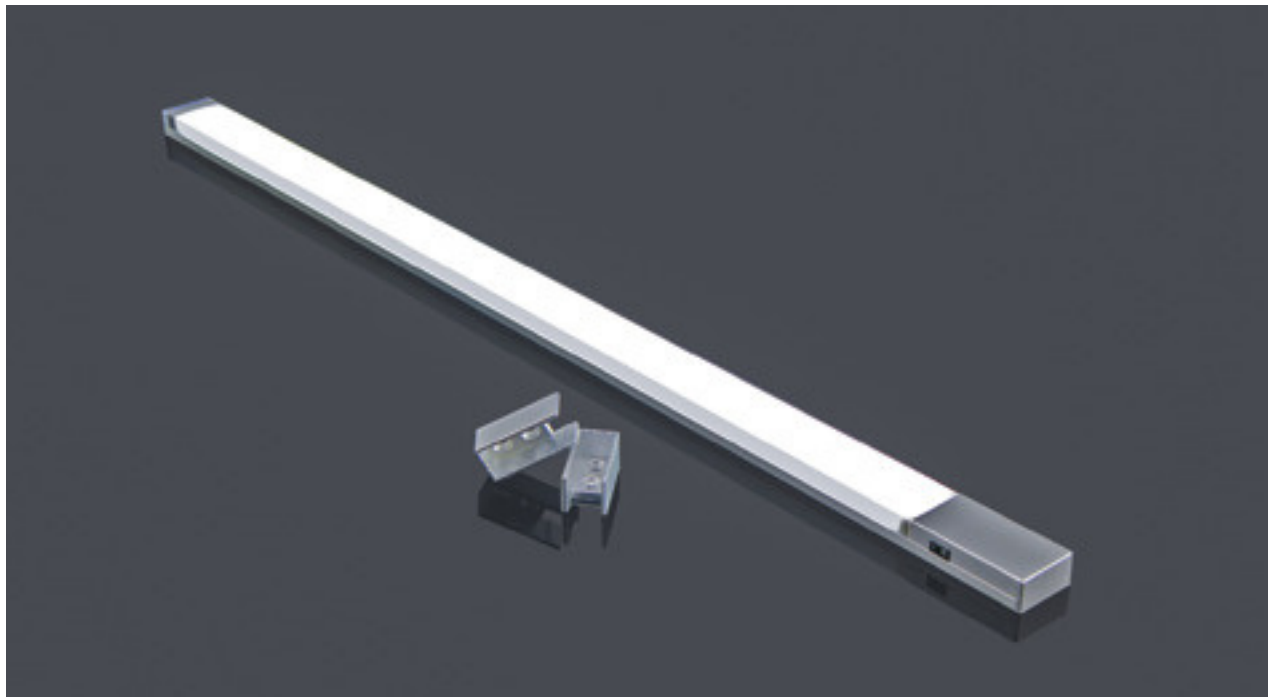

SLT 34402 Dimension

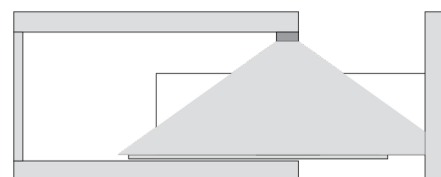



Lighting effect

Specification	Connecting Cable	1.8 metre 30000 hr.
	LED Tested	Anodized matt Silver
	Finishing	Aluminium, PC
	Material	


Code	Length	Wattage	Voltage	Colour Temp.
SLT 34402-567	567 mm	5.4 W	DC 12V	4000 K (Warm White)
SLT 34402-867	867 mm	8.6 W	DC 12V	4000 K (Warm White)
SLT 34402-1167	1167 mm	11.8 W	DC 12V	4000 K (Warm White)




LED WOOD SHELF LIGHTING

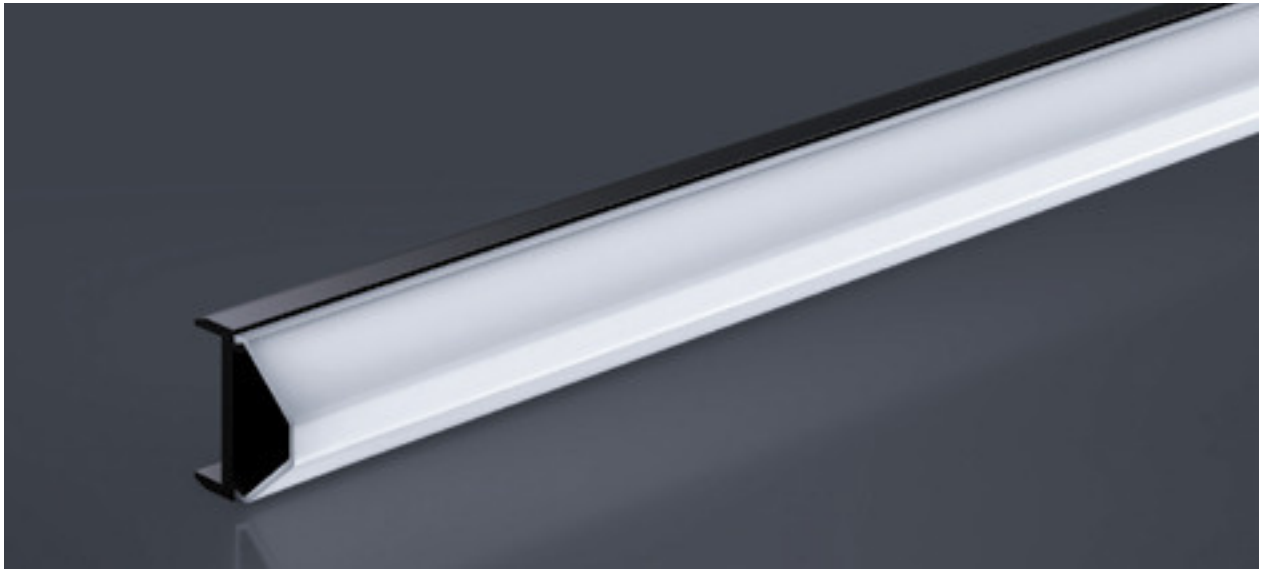

SLT 35409
Profile Dimension

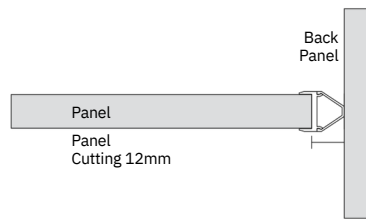

Wood Edge Mounted

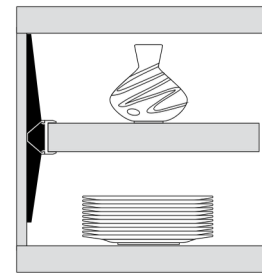

Lighting effect

Feature


- Hidden lighting design.
- Light up & down illuminate the whole cabinet.
- Thickened aluminium with bending resistance.
- Standard with no switch, optional with Sommer induction switch.

Specification	Connecting Cable	1.8 metre
	LED Tested	30000 hr.
	Finishing	Black
	Material	Aluminium
	Switch	Not supply


Code	Length	Wattage	Voltage	Colour Temp.
SLT 35409-060B	567 mm	5.5 W	DC 12V	4000 K (Warm White)
SLT 35409-090B	867 mm	8.5 W	DC 12V	4000 K (Warm White)




| LED ROUND LIGHT WITHOUT SENSOR



SLT 32311 & SLT 32411
Profile Dimension

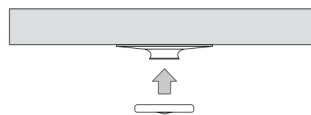

Surface Mounted

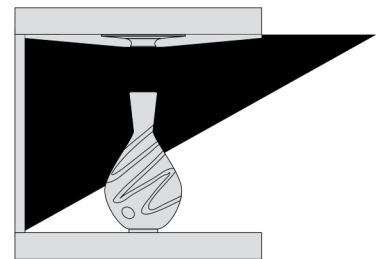

Lighting effect

Feature

- 12 hours oxidation coloring, making the reflected light delicate.
- Break the tradition and present different light effects.
- High quality metal polishing is a work of art in itself.
- Standard with no switch, optional with Sommer induction switch.

Specification	Connecting Cable	1.8 metre
	LED Tested	30000 hr.
	Finishing	Anodized matt Silver
	Material	Aluminium
	Switch	Not supply

Code	Diameter	Wattage	Voltage	Colour Temp.
SLT 32311	Ø80	2.5 W	DC 12V	3000 K (Warm Light)
SLT 32411	Ø80	2.5 W	DC 12V	4000 K (Warm White)

every home needs




LED ROUND LIGHT





SLT 32301 & SLT 32401
Surface Mounted LED Round Light




SLT 32408 & SLT 32308
Conceal Mounted LED Round Light

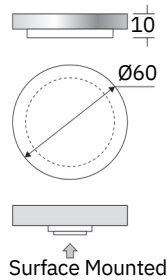

Surface Mounted

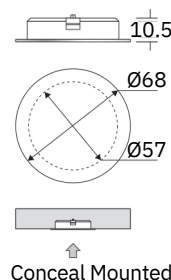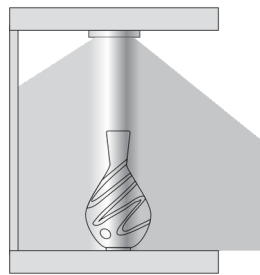

Conceal Mounted

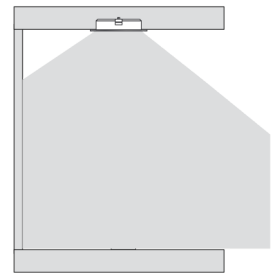

Specification	Connecting Cable	1.8 metre
	LED Tested	30000 hr.
	Finishing	Anodized matt Silver
	Material	Aluminium
	Switch	Not supply

Code	Finishing	Wattage	Voltage	Colour Temp.
SLT 32301WH	Aluminium	2.2 W	DC 12V	3000 K (Warm Light)
SLT 32301.B	Black	2.2 W	DC 12V	3000 K (Warm Light)
SLT 32401WH	Aluminium	2.2 W	DC 12V	4000 K (Warm White)
SLT 32401.B	Black	2.2 W	DC 12V	4000 K (Warm White)
SLT 32308	Graphite	2.2 W	DC 12V	3000 K (Warm Light)
SLT 32308.Blk	Black	2.2 W	DC 12V	3000 K (Warm Light)
SLT 32408	Graphite	2.2 W	DC 12V	4000 K (Warm White)
SLT 32408.Blk	Black	2.2 W	DC 12V	4000 K (Warm White)

Please specify Finishing when placing an order for LED Round Light

| SENSOR SERIES



IR Door Sensor



SLT 37011

Voltage DC 12V - 24V
Controllable Load $\leq 5A \leq 60W$
Sensitive Distance 30 - 80 mm

IR Double Door Sensor



SLT 37012

Voltage DC 12V - 24V
Controllable Load $\leq 5A \leq 60W$
Sensitive Distance 30 - 80 mm

Hand Sweep Sensor



SLT 37014

Voltage DC 12V - 24V
Controllable Load $\leq 5A \leq 60W$
Sensitive Distance 30 - 80 mm

PIR Movement Sensor



SLT 37010

Voltage DC 12V - 24V
Controllable Load $\leq 5A \leq 60W$
Sensitive Distance 30 - 80 mm
Time Delayed $30 \pm 5s$
Induction Angle 60°

PIR Double Movement Sensor



SLT 37013

Voltage DC 12V - 24V
Controllable Load $\leq 5A \leq 60W$
Sensitive Distance 30 - 80 mm
Time Delayed $30 \pm 5s$
Induction Angle 60°

SENSOR SERIES



Intelligent

Voice Controller Switch -

Multiple voice password support

- No internet required
- Plug and play
- Power saving sleep mode
- Easy install without drilling
- Lights can be dimmed
- Delay off lights



SLT 37016 (Chinese Version) /
SLT 37016/E (English Version)

Colour	Black
Voltage	DC 12V - 24V
Shell Size	ø 52 x 6 (H)
Language	English or Chinese



On - Off Switch




SLT 37001

Finishing	Beige or Black
Voltage	250 VAC

IR Door Sensor

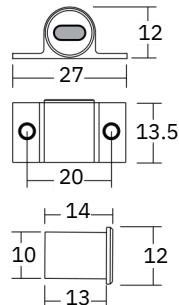


PIR Movement Sensor

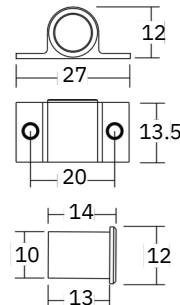

Hand Sweep Sensor



Movement sensor



Rotate to brighten
and dim the lights

LED DRIVER BLACK SERIES




Product Features:

1. Overvoltage protection
2. Short-circuit protection
3. Overcurrent protection
4. Noise-free
5. Sufficient power

Product Performance:


- CE certified
- Waterproof rating IP20
- Lifespan >50,000 hours
- Material & Surface Treatment: PC & White

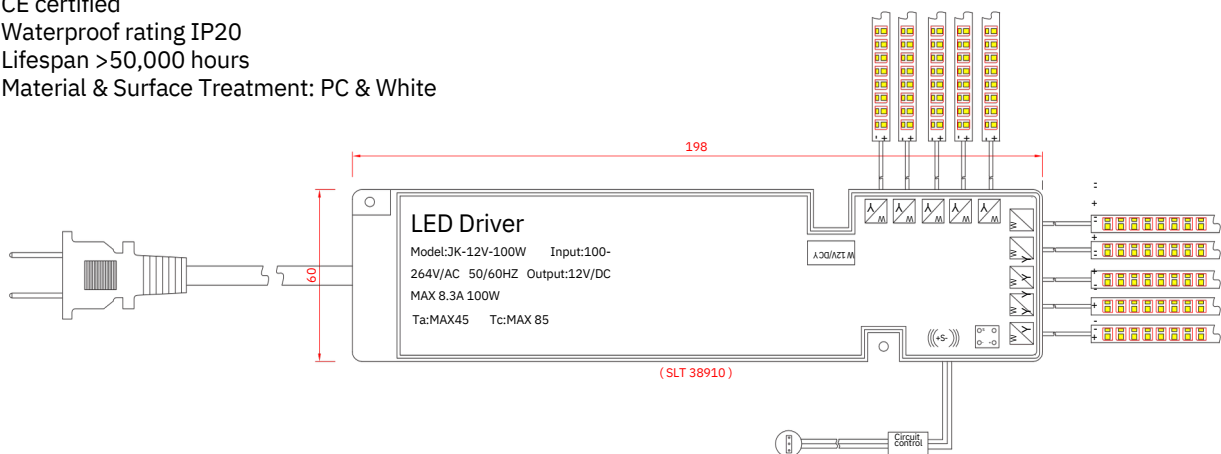


Code	Description	Size	Max. Wattage	Input Voltage	Output Voltage	Output Current
SLT 38924	EMC Series 12V Led Driver 24W	118 x 53 x 190-24 w		170-265V : 50-60Hz	DC 12 V	2A
SLT 38960	EMC Series 12V Led Driver 60W	168 x 60 x 210-60 w		170-265V : 50-60Hz	DC 12 V	5A
SLT 38910	EMC Series 12V Led Driver 100W	198 x 60 x 210-100 w		170-265V : 50-60Hz	DC 12 V	8.3A

** We recommend choosing a driver with a wattage capability at least 20% higher than the wattage the LED tape requires to ensure a longer lifespan **

| DRIVER WATT CONNECTING

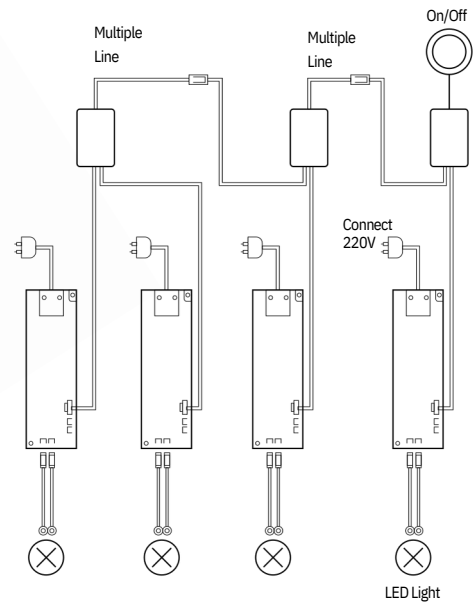

Instructions

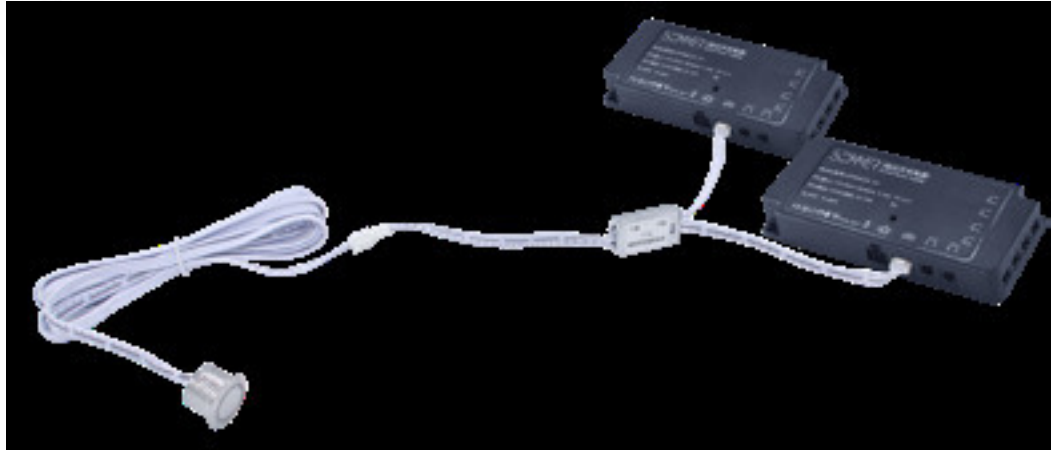

Feature

One-control multi-switch 12V power supply connection module. When multiple sets of power supplies are controlled synchronously, one switch can be used to control multiple sets of power supplies, which can stabilize the model and switch at the same time.


Code	Description	Voltage	Colour	Length
SLT 36602T	Driver Watt Connecting	DC 12 V	White	250

** We recommend choosing a driver with a wattage capability at least 20% higher than the wattage the LED tape requires to ensure a longer lifespan **

RGB LED DRIVER WITH BUILD IN CONTROL




Feature Integrated 10-bit port.

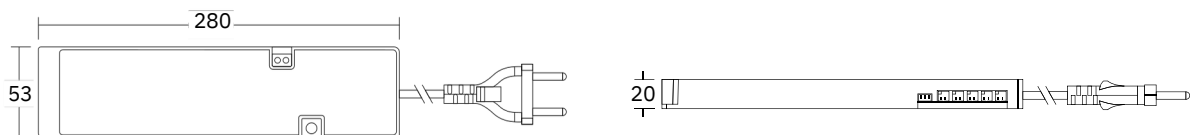

Code	Driver Size L x W x H	Max. Wattage	Input Voltage	Output Voltage	Output Current	Number of Slot
SLT 35513-100	280 x 53 x 20	0-100 W	170-264 V : 50-60 Hz	DC 12 V	8A	10

** We recommend choosing a driver with a wattage capability at least 20% higher than the wattage the LED tape requires to ensure a longer lifespan **

INTELLIGENT REMOTE CONTROLLER

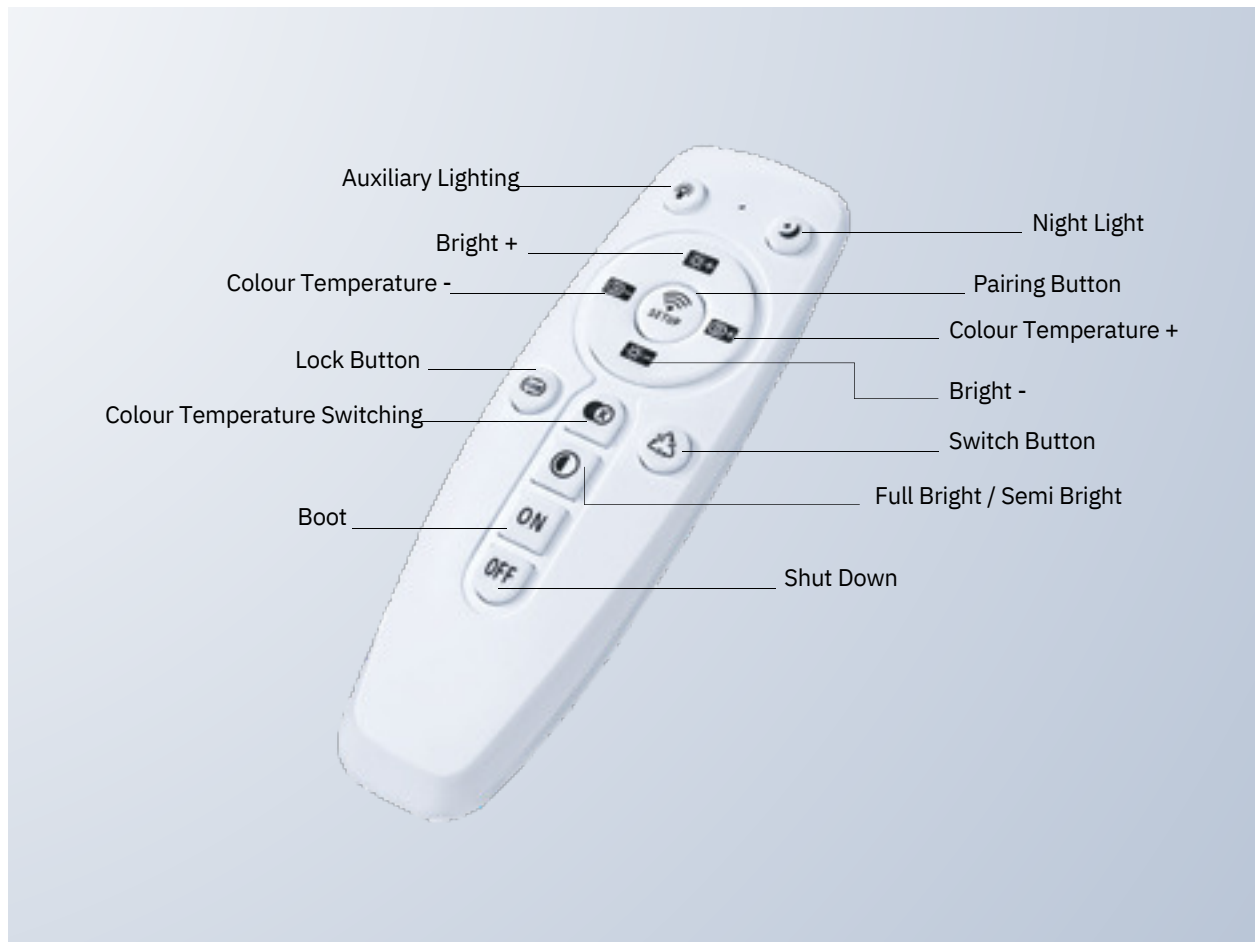

Feature 100% Brand new and high quality, easy to install, not obstructed by walls, compatible with any loads, Use to turn on /off lights at home furniture, providing you a smart lighting.

Function LED Touch Control, Waterproof, Digital LED Display, Privacy, Heat Adjustment, Auto shut-off, Heat Control, LED indicator light, Timer Function, Anti shock, Single Service, Automatic, Single Serve, USB Rechargeable, AIR MOUSE, Voice control, Mini Keyboard




Controller Only For 35513

Code	Description	Size	Transmission distance	Battery	Colour
SLT 35513/CO	Remote Control	135 x 50 x 20	≥8m	AAA batteries x 2 pcs	White



Feature Integrated 6-bit port.
20 W / 30W high wattage, Low head.

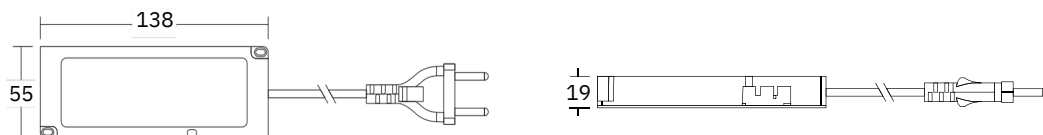


Code	Driver Size L x W x H	Input Voltage	Output Voltage	Output Wattage	Output Current
SLT 39937	138 x 55 x 19	AC 100 - 240 V	DC 12 V	37 W	3 A

** We recommend choosing a driver with a wattage capability at least 20% higher than the wattage the LED tape requires to ensure a longer lifespan **



Feature Integrated 6-bit port.

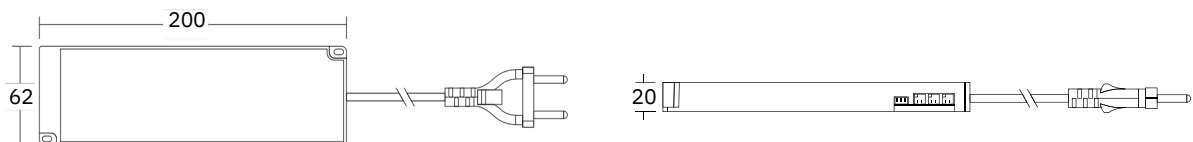


Code	Driver Size L x W x H	Max. Wattage	Input Voltage	Output Voltage	Output Current	Number of Slot
SLT 39960	200 x 62 x 20	0 - 60 W	175 - 240 V : 50 - 60 Hz	DC 12 V	5.8 A	6

** We recommend choosing a driver with a wattage capability at least 20% higher than the wattage the LED tape requires to ensure a longer lifespan **

| LED FLEXIBLE STRIP LIGHT

every home needs

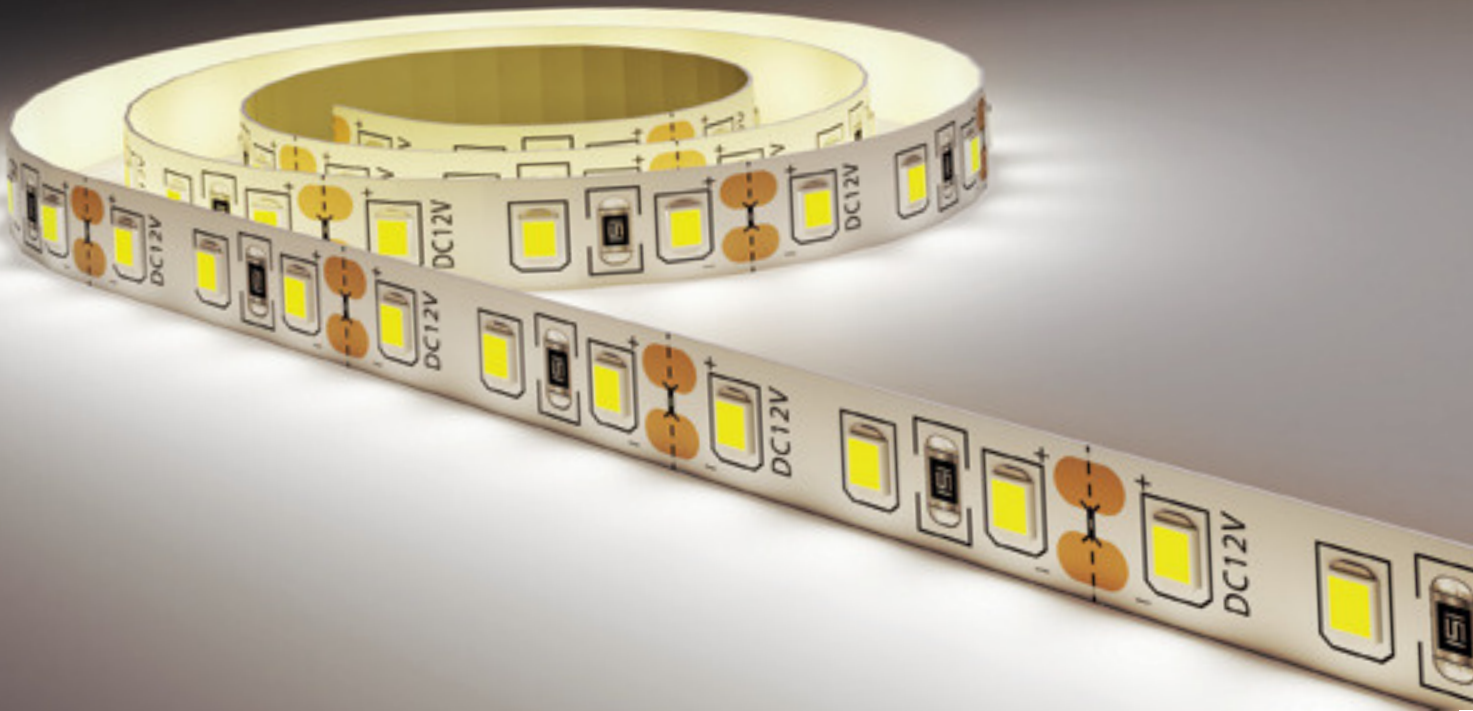

CodeNumber of LED	Wattage	Voltage	Col. Temp.	Length
SLT 32835D-60.3K/5m60 LEDs / meter	24W (4.8W / meter)	DC 12V	3000 K	5 meter / roll
SLT 32835D-60.4K/5m60 LEDs / meter	24W (4.8W / meter)	DC 12V	4000 K	5 meter / roll
SLT 32835D-120.3K/3m120 LEDs / meter	48W (9.6W / meter)	DC 12V	3000 K	3 meter / roll
SLT 32835D-120.3K/5m120 LEDs / meter	48W (9.6W / meter)	DC 12V	3000 K	5 meter / roll
SLT 32835D-120.4K/3m120 LEDs / meter	48W (9.6W / meter)	DC 12V	4000 K	3 meter / roll
SLT 32835D-120.4K/5m120 LEDs / meter	48W (9.6W / meter)	DC 12V	4000 K	5 meter / roll
SLT 32837D-120.5m (RGB)120 LEDs / meter	48W (9.6W / meter)	DC 12V	3000 K-6000 K	5 meter / roll
SLT 32733D-120.3K/5m/5mm120 LEDs / meter	48W (9.6W / meter)	DC 12V	3000 K	5 meter / roll
SLT 32733D-120.4K/5m/5mm120 LEDs / meter	48W (9.6W / meter)	DC 12V	4000 K	5 meter / roll

Please specify COL. TEMP and LENGTH when placing an order for the LED strip

Lighting Effect



LED FLEXIBLE STRIP LIGHT CONNECTION

Power Connecting Cable



Code	Length	Colour
SLT 36602. 5B	1.8 metre	White

Power Connecting Cable



Code	Length	Colour
SLT 36602. 8B	1.8 metre	White

Extension Cable



Code	Length	Colour
SLT 36602. D	1.8 metre	White

Connecting Box




Code	Length	No. Slot	Colour
SLT 31002	190	6	White

5mm & 8mm Lighting Connector



Code	Colour
SLT 36602-5H	Translucent
SLT 36602-8H	Translucent

90 Degree 8mm Lighting Connector

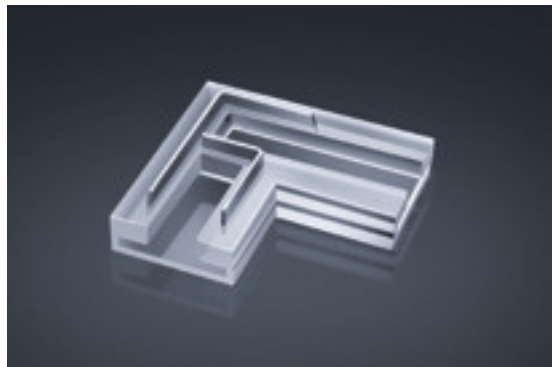

Code	Colour
SLT 36602 F	Translucent


CHIP ON BOARD (COB) LED LIGHT

every home needs

Low voltage 12V light belt,
Safe to touch and widely to use

Code	Number of LED	Wattage	Voltage	Col. Temp.	Length
SLT 32836D-320.3K/3mt	320 LEDs / meter	12W / meter	DC 12V	3000 K	3 meter / roll
SLT 32836D-320.3K/3mt/5mm	320 LEDs / meter	12W / meter	DC 12V	3000 K	3 meter / roll
SLT 32836D-320.3K/5mt	320 LEDs / meter	12W / meter	DC 12V	3000 K	5 meter / roll
SLT 32836D-320.3k/5mt/5mm	320 LEDs / meter	12W / meter	DC 12V	3000 K	5 meter / roll
SLT 32836D-320.4K/3mt	320 LEDs / meter	12W / meter	DC 12V	4000 K	3 meter / roll
SLT 32836D-320.4K/3mt/5mm	320 LEDs / meter	12W / meter	DC 12V	4000 K	3 meter / roll
SLT 32836D-320.4K/5mt	320 LEDs / meter	12W / meter	DC 12V	4000 K	5 meter / roll
SLT 32836D-320.4k/5mt/5mm	320 LEDs / meter	12W / meter	DC 12V	4000 K	5 meter / roll
SLT 32836D-320.6K/5mt	320 LEDs / meter	12W / meter	DC 12V	6000 K	5 meter / roll

Please specify COL. TEMP and LENGTH when placing an order for SLT 32836D-320

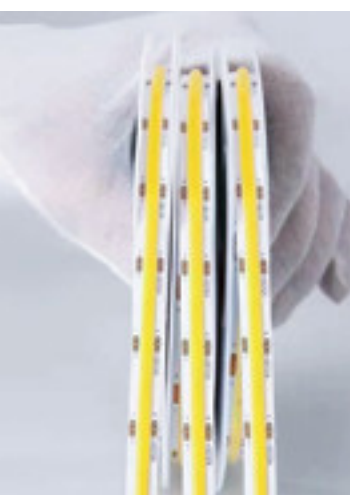



Free Cutting And Self-Adhesive

Can be cut every 2.5cm at black line position.
(The double-sided tape become more sticky when heated.)





90+ Highlight Effect Displayed Colour

LED have excellence natural light effect, no visible light spots and the light effect can be as high as about 1000LM.



Only 12V Safe to Use

Low voltage safe to touched directly.

LED FLEXIBLE STRIP LIGHT CONNECTION (COB)

Power Connecting Cable (COB)



Code	Length	Colour
SLT 32836. 5B	1.8 metre	White

Power Connecting Cable (COB)



Code	Length	Colour
SLT 32836. 8B	1.8 metre	White

Extension Cable



Code	Length	Colour
SLT 36602. D	1.8 metre	White

Connecting Box




Code	Length	No. Slot	Colour
SLT 31002	190	6	White

5mm & 8mm Lighting Connector







Code	Colour
SLT 36602-5H	Translucent
SLT 36602-8H	Translucent

90 Degree 8mm Lighting Connector




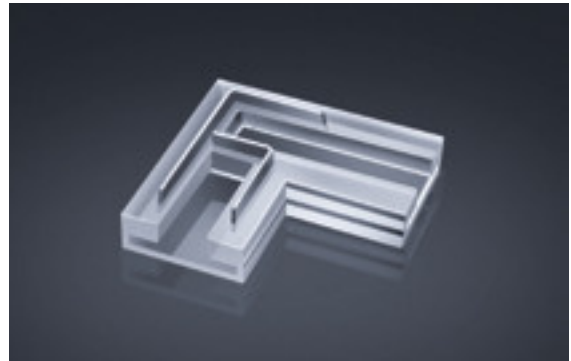


Code	Colour
SLT 36602 F	Translucent

| HANDLE WITH LED GROOVE


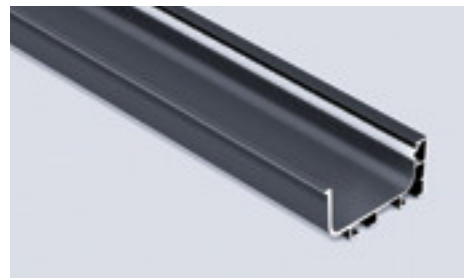
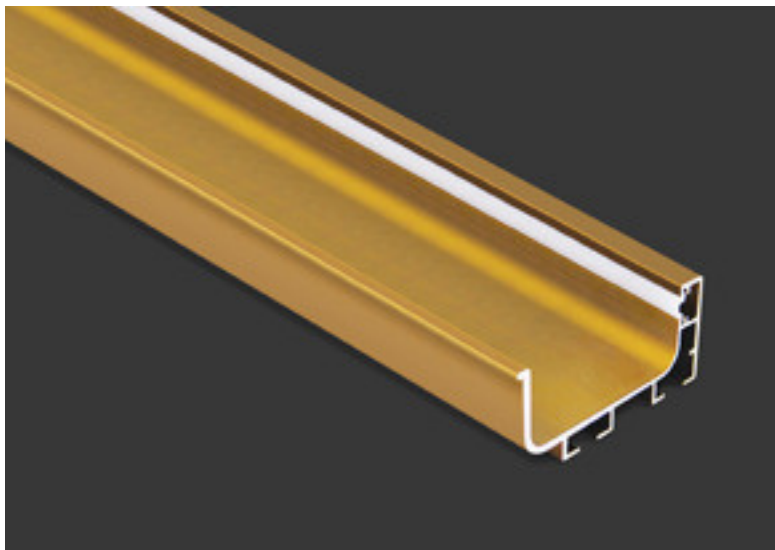


Code	Description	Finishing	Length
SLG 33081B-300	U(s) Handle with LED Groove 3Mtr - Black (56.8x25.7)	Black	3 meter
SLG 33081G-300	U(s) Handle with LED Groove 3Mtr - Gold (56.8x25.7)	Gold	3 meter

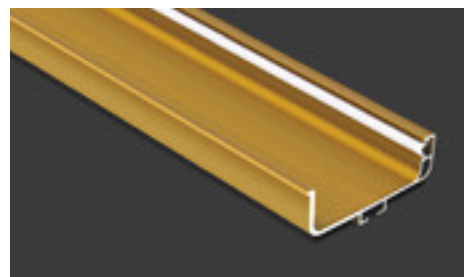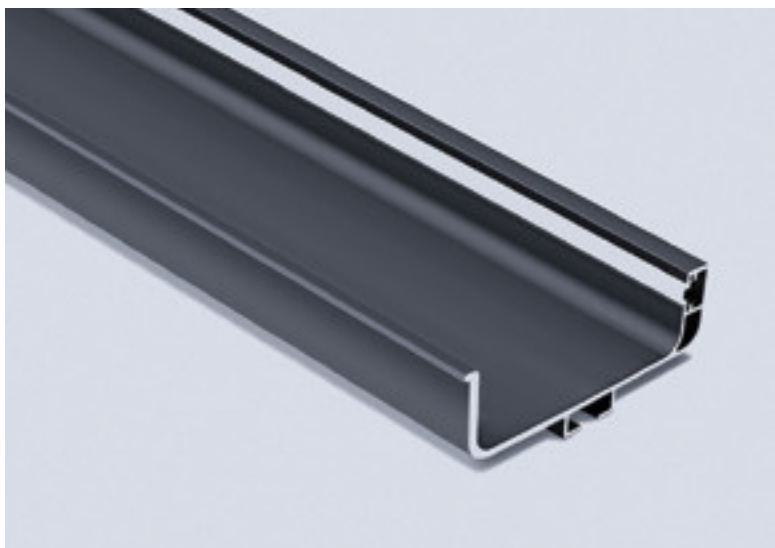

Code	Description	Finishing	Length
SLG 33080B-300	U(b) Handle with LED Groove 3Mtr - Black (73 x 20.2)	Black	3 meter
SLG 33080G-300	U(b) Handle with LED Groove 3Mtr -Gold (73 x 20.2)	Gold	3 meter

| ISLAND HANDLE COVER | CORNER CAP


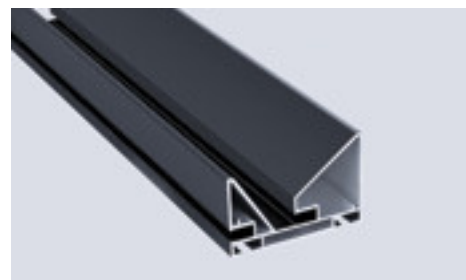
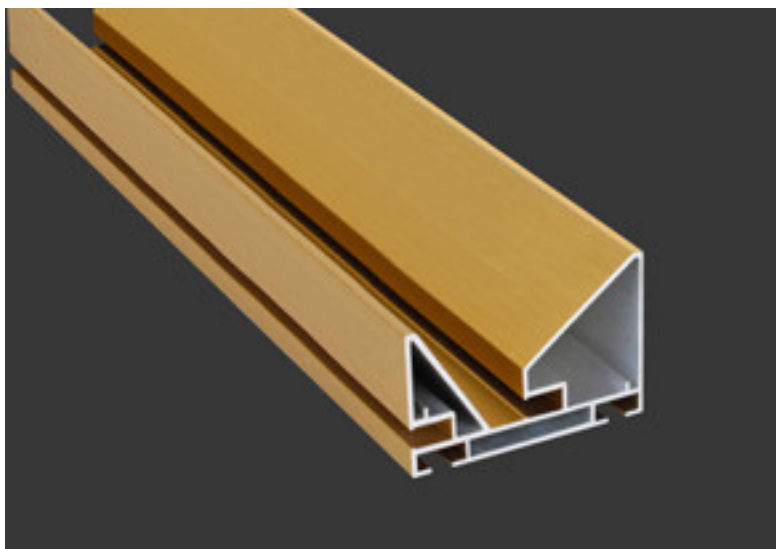


Code	Description	Finishing	Length
SLG 33083B-300	Island Handle with Cover 3Mtr (70 x 42)	Black	3 meter
SLG 33083G-300	Island Handle with Cover 3Mtr (70 x 42)	Gold	3 meter






Code	Description	Finishing
SLG 33084B	Island Handle Corner Cap	Black
SLG 33084G	Island Handle Corner Cap	Gold

VERTICAL DOOR HANDLE WITH LED GROOVE


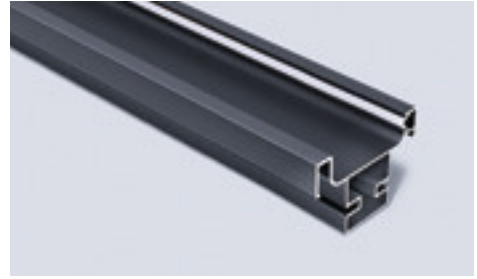
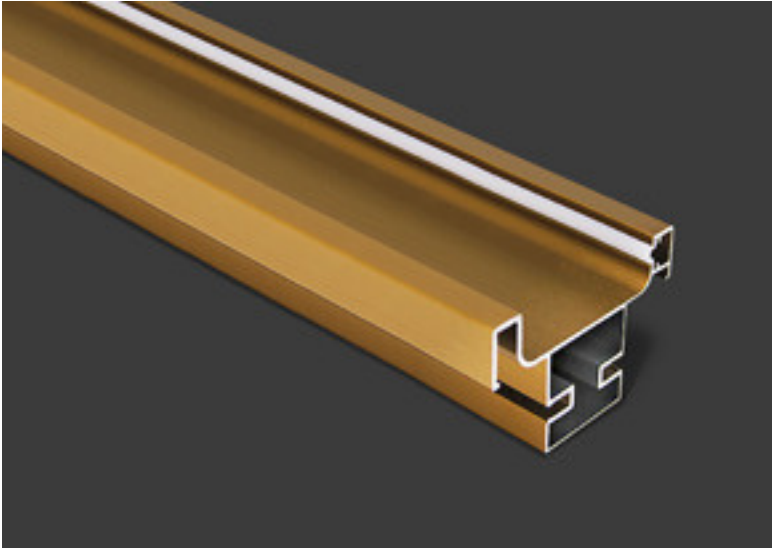


Code	Description	Finishing	Length
SLG33082B-300	Vertical Double Door Handle with LED Groove (66.5 x 42)	Black	3 meter
SLG33082G-300	Vertical Double Door Handle with LED Groove (66.5 x 42)	Gold	3 meter


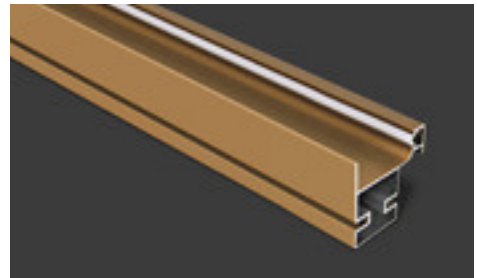
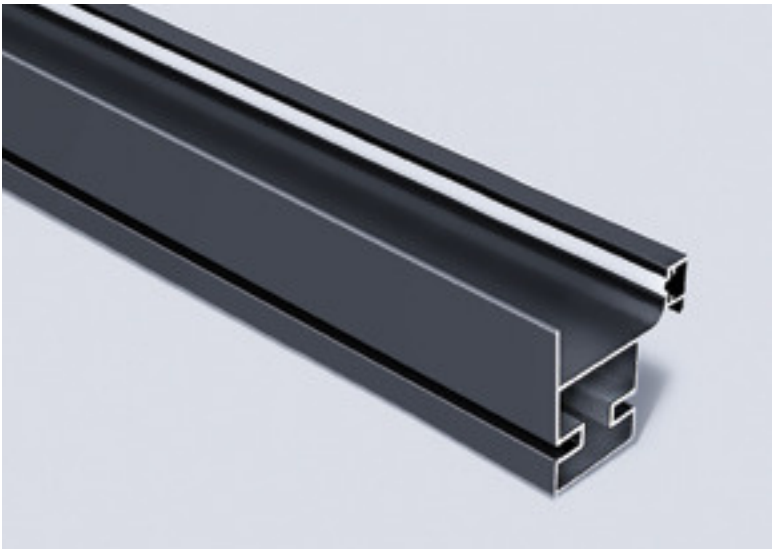


Code	Description	Finishing	Length
SLG33085B-300	Vertical Single Door Handle with LED Groove (48 x 42)	Black	3 meter
SLG33085G-300	Vertical Single Door Handle with LED Groove (48 x 42)	Gold	3 meter

| SKIRTING WITH LED GROOVE | CORNER CAP

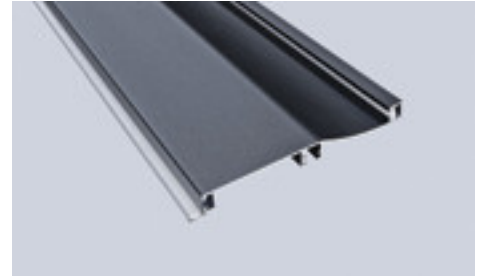
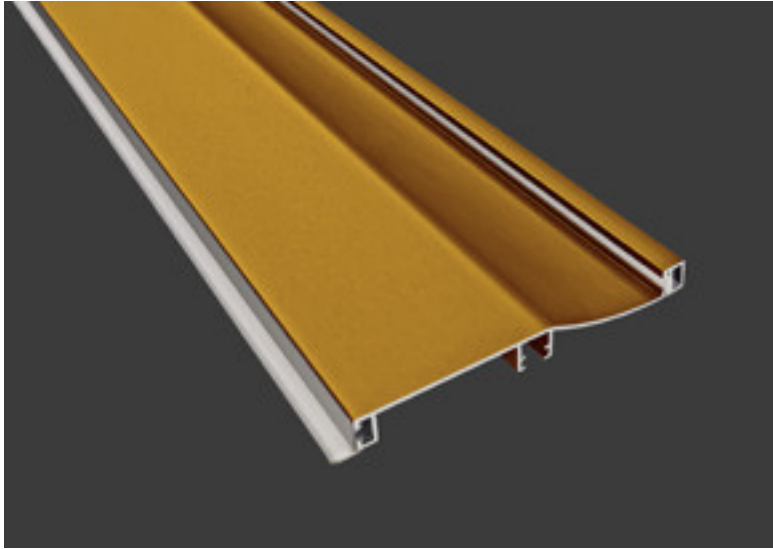


Code	Description	Finishing	Length
SLG 33086B-300	100mm Skirting with LED Groove	Black	3 meter
SLG 33086G-300	100mm Skirting with LED Groove	Gold	3 meter

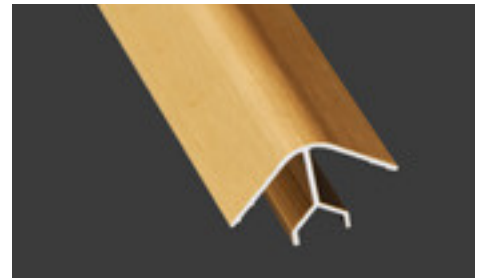
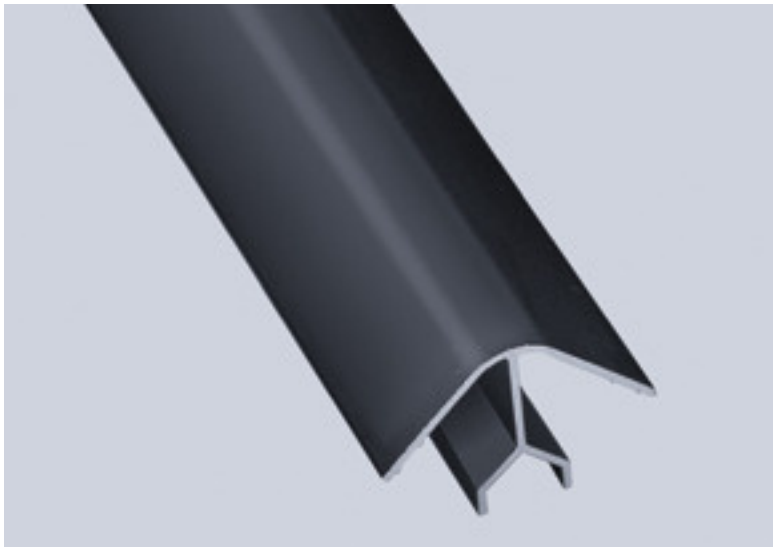


Code	Description	Finishing	Length
SLG33087B	Corner Cap 100mm Skirting with LED Groove	Black	100 mm
SLG33087G	Corner Cap 100mm Skirting with LED Groove	Gold	100 mm



LED ALUMINIUM GROOVE

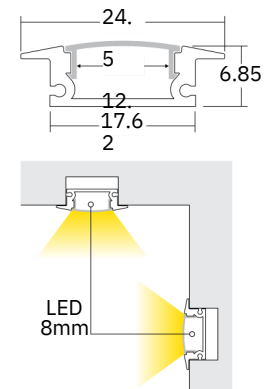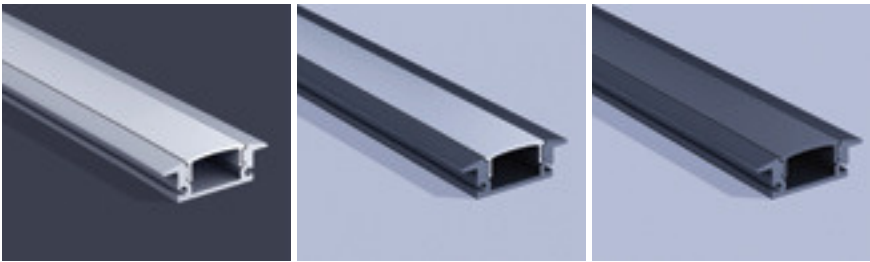

Code	Finishing	Length
SLG 30508-300	Silver	3 meter
SLG 30508BW	Black (Cover White)	3 meter
SLG 30508BB	Black	3 meter


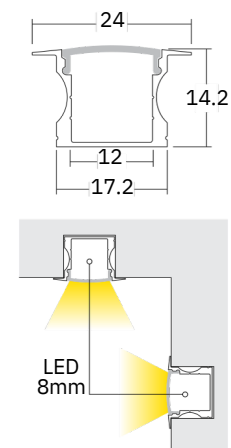
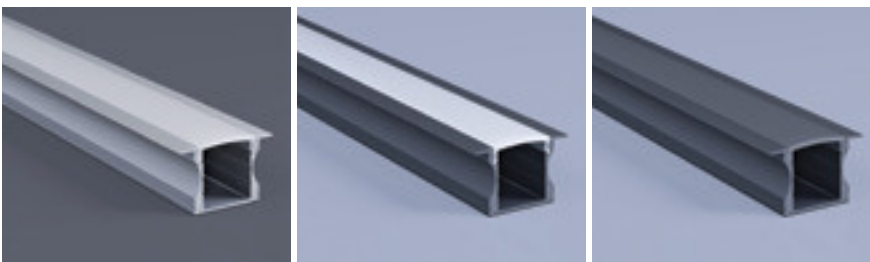


Code	Finishing	Length
SLG 30613-300	Silver	3 meter
SLG 30613-300BW	Black (Cover White)	3 meter
SLG 30613-300Blk	Black	3 meter



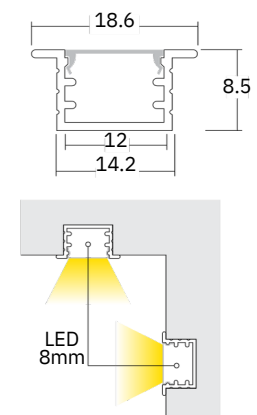
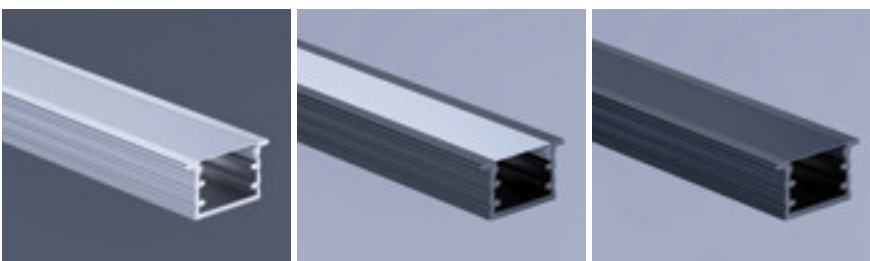


Code	Finishing	Length
SLT 31409A-300	Silver	3 meter
SLT 31409A-300BW	Black (Cover White)	3 meter
SLT 31409A-300Blk	Black	3 meter

LED ALUMINIUM GROOVE



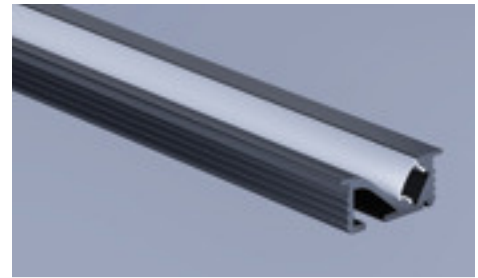


Code	Finishing	Length
SLG 30663-300	Silver	3 meter
SLG 30663-300BW	Black (Cover White)	3 meter

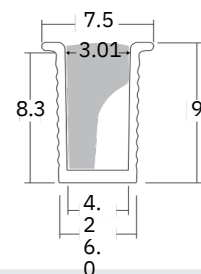
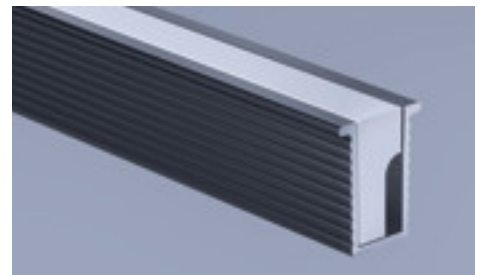
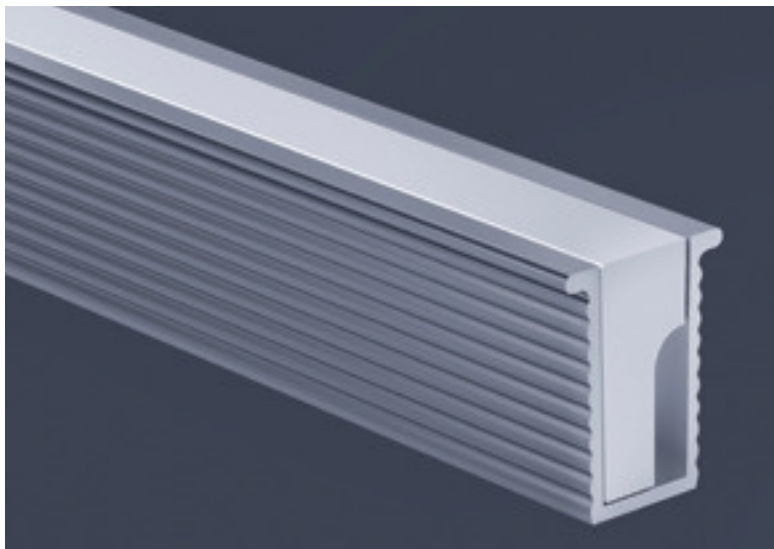


Code	Finishing	Length
SLT 306090.G	Grey	3 meter
SLT 306090.B	Black	3 meter

LED ALUMINIUM GROOVE



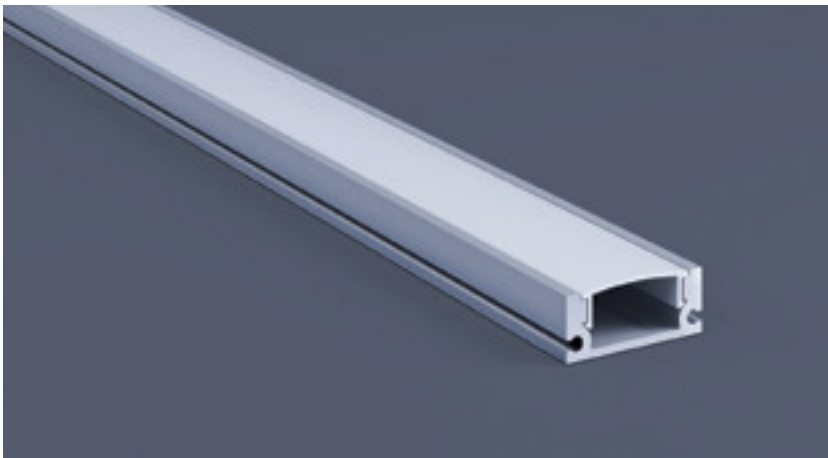


Code	Finishing	Length
SLG 30509-300	Silver	3 meter



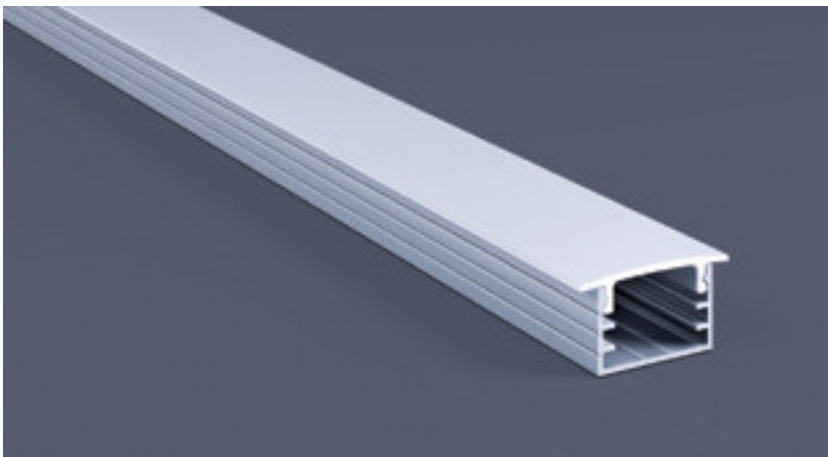


Code	Finishing	Length
SLG 38801	Silver	3 meter

| LED ALUMINIUM GROOVE

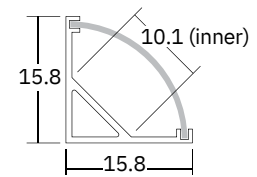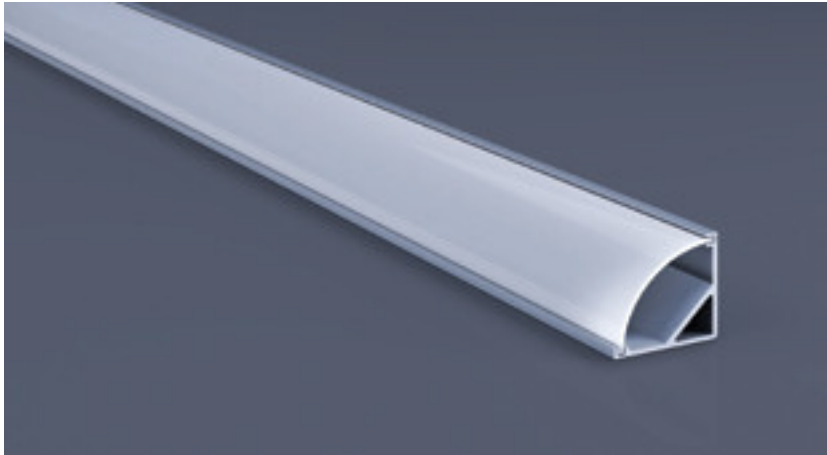


Code	Finishing	Length
SLG 30601-300	Silver	3 meter

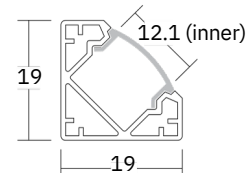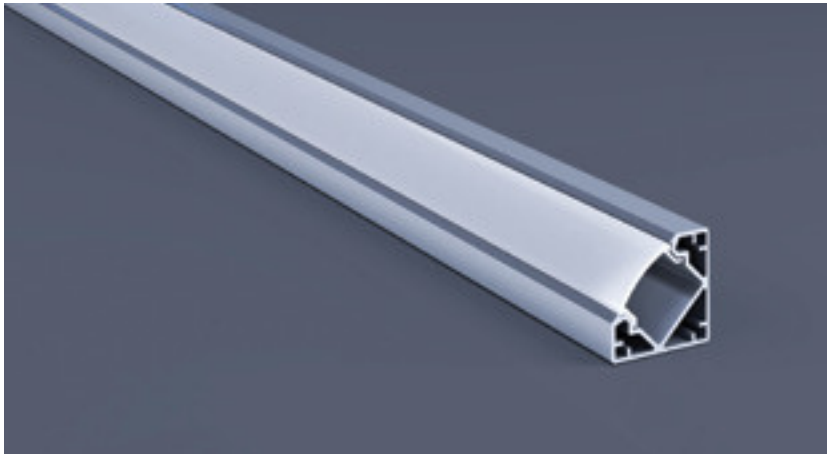


Code	Finishing	Length
SLG 30614-300	Silver	3 meter

ALUMINUM GROOVE WITH LED STRIP CONNECTING BRACKET 2 MTR



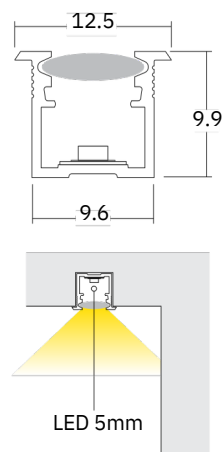


Code	Description	Finishing	Length
SLG 33013-300	Aluminium Groove Complete with LED Strip 4000k	Silver	3 meter
SLG 33014	Connecting Bracket 2Mtr	Silver	2 meter

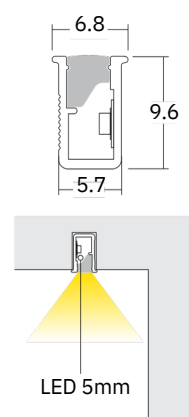


Code	Description	Finishing	Length
SLG 33015-300	6 X 10 Aluminium Groove Complete with LED Strip 4000k	Silver	3 meter
SLG 33016	6 x10 Connecting Bracket 2Mtr	Black	2 meter

LED SILICONE CASING

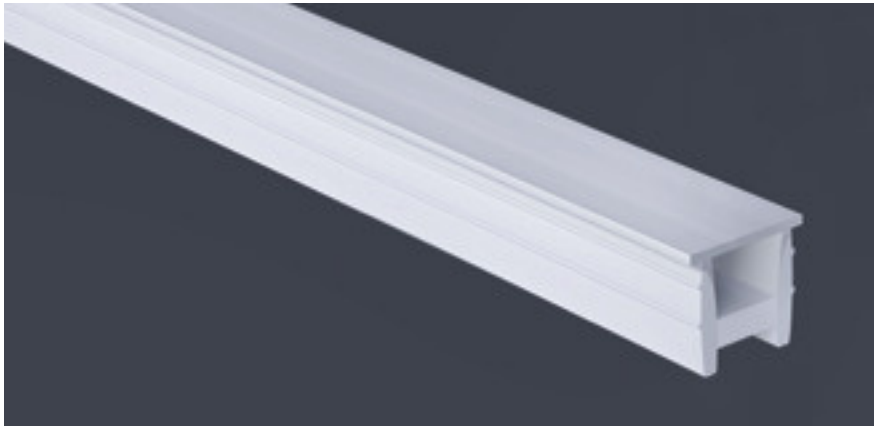


Code	Description	Finishing	Length
SLT 30702	LED Silicone Casing 10mm x 10mm	White	50 meter

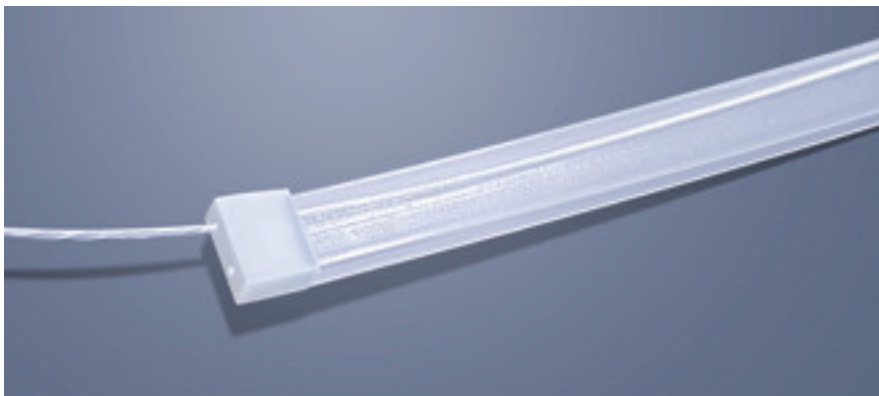

Code	Description	Finishing	Length
SLT 30703	IP65 Led Strip Silicone Cover 8mm	Translucent	50 meter

LED STRIP DRIVER

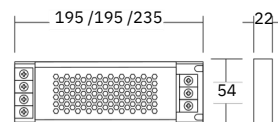

Code	Maximum Wattage (W)	Input Voltage	Output Voltage	Output Current	Number of Slots
SLT 35510 - 60	0 - 60 W	175 - 240V ; 50 - 60Hz	DC 12 V	5 A	6
SLT 35511 - 100	0 - 100 W	175 - 240V ; 50 - 60Hz	DC 12 V	8.3 A	6
SLT 35512 - 150	0 - 150 W	175 - 240V ; 50 - 60Hz	DC 12 V	12.5 A	6

